

# Inverse Problems

*Do the Impossible – Solve the Impossible*

*Per Christian Hansen*

Professor, Villum Investigator  
Section for Scientific Computing



What it's like to do research


Heian Shrine, Kyoto

**DTU Compute**






Department of Applied Mathematics and Computer Science

---

# About Me ...

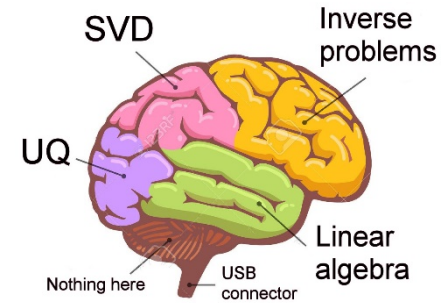


- Numerical analysis & inverse problems – regularization algorithms, matrix computations, image deblurring, signal processing, Matlab software, ...
- Head of the Villum Investigator project Computational Uncertainty Quantification for Inverse Problems. → **CUQI**
- Author of several Matlab software packages.
- Author of four books (one more underway).




# What is an Inverse Problem?

In a **forward problem**, we use a mathematical model to compute the output from a “system” given the input.

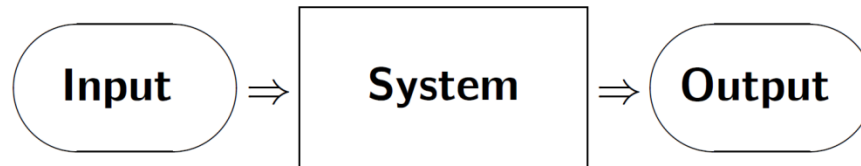

In an **inverse problem** we estimate a quantity that is not directly observable, using indirect measurements and the forward model.

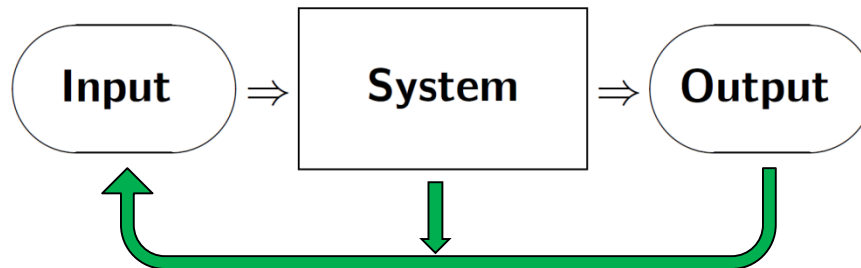


Some examples on the next pages.

# Example: Tomography


Image reconstruction from projections.

Medical imaging

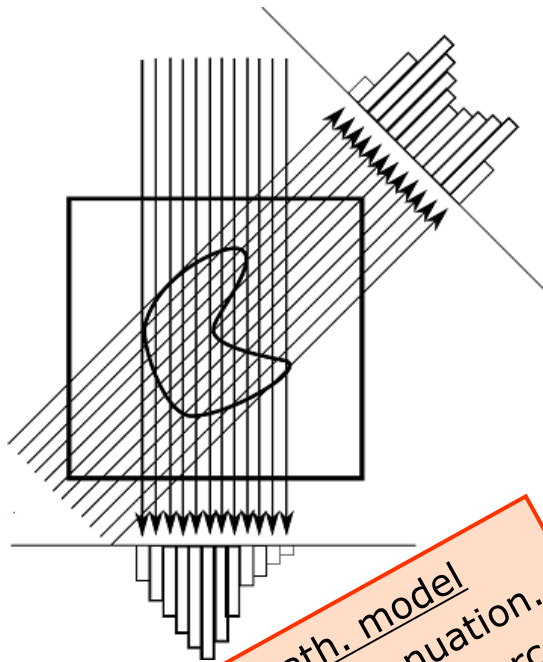



- Required in the math. model
- Physics of X-ray attenuation.
  - Strength of the X-ray source.
  - Specification of the geometry.

Materials science

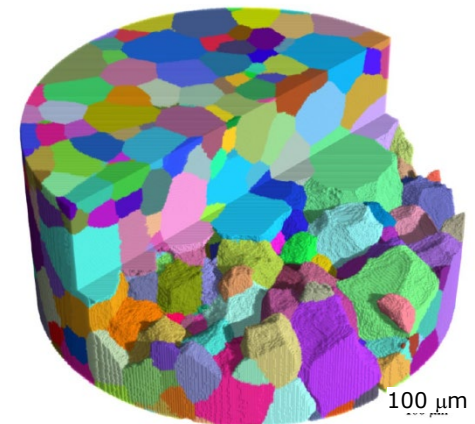


# Example: Rotational Image Deblurring

Application: "star camera" used in satellite navigation.

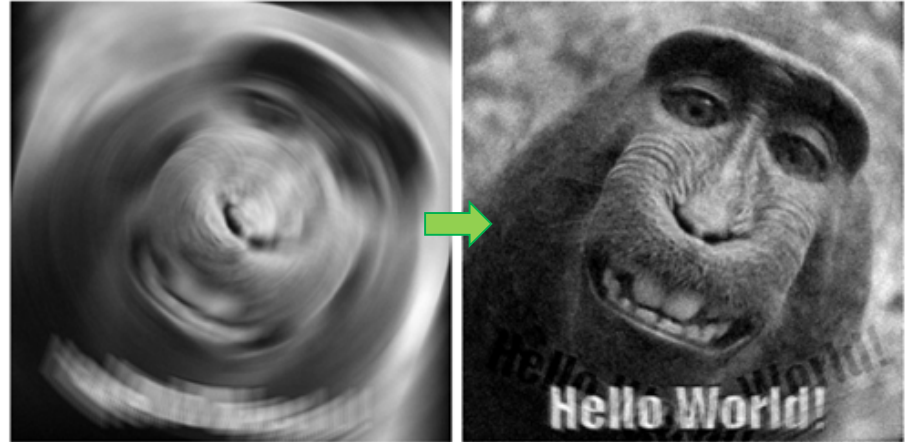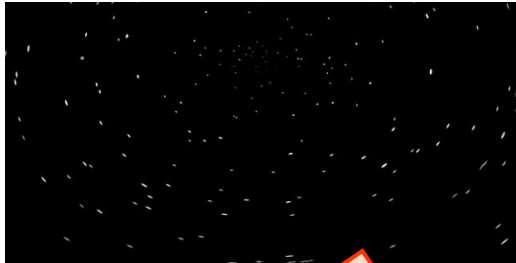

Required in the math. model

- Center of rotation.
- Rotation angle.

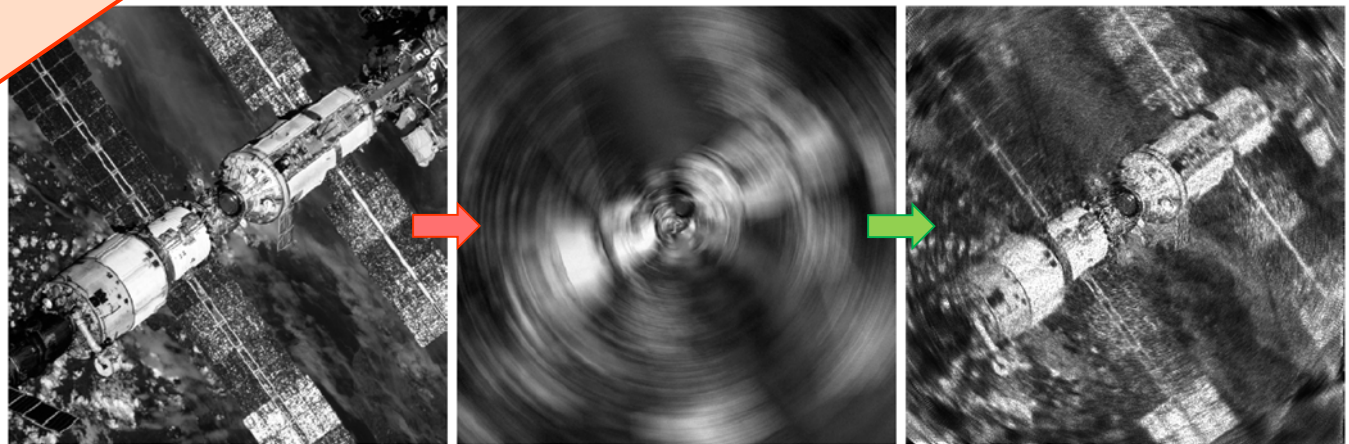

# Inverse Problem and Mathematics

## Inverse problems

- arise when we use a mathematical model  $\mathcal{K}$
- to infer about *internal* or *hidden features*  $f$
- from *external* and/or *indirect measurements*  $g$ .

$$\mathcal{K}f = g$$

## Why mathematics is important

- A solid foundation for formulation of inverse problems.
- A framework for developing computational algorithms.
- A “language” for defining and expressing the properties of the solutions: existence, uniqueness, stability, reliability, ...

# Some Formulations

Mathematical formulations of inverse problems take different forms.

Fredholm integral equation of the first kind:

$$\int_0^1 K(s, t) f(t) dt = g(s) , \quad 0 \leq s \leq 1 .$$

**This talk**

Calderón problem (PDE with Dirichlet BC):

$$\begin{cases} \nabla \cdot \sigma \nabla u = 0 & u \in \Omega \\ u = f & u \in \partial\Omega \end{cases}$$

Fascinating: very different applications of inverse problems lead to the same formulations.

# A Few Simple Examples

$$\int K(s, t) f(t) dt = \frac{1}{6} (s^3 - s) , \quad K(s, t) = \begin{cases} s(t - 1) , & s < t \\ t(s - 1) , & s \geq t . \end{cases}$$

The solution is the second derivative, so  $f(t) = t$ .

$$\int_0^{2\pi} K(s - t) f(t) dt = g(s) , \quad f, g, K \text{ are } 2\pi\text{-periodic.}$$

This is deconvolution; the solution is formally given by

$$f(t) = \mathcal{F}^{-1}(\mathcal{F}(g) / \mathcal{F}(k)) , \quad \mathcal{F} = \text{Fourier transform.}$$

$$\int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \delta(x \cos \theta + y \sin \theta - s) f(x, y) dx dy = g(s, \theta)$$

$$s \in [0, 1] , \quad \theta \in [0, 2\pi) .$$

This is the Radon transform underlying X-ray CT.



# Eigenvalue Analysis for Symmetric Kernel

$$\int_0^1 K(s, t) f(t) dt = g(s) = 1, \quad 0 \leq s \leq 1.$$

A symmetric kernel  $K(s, t) = K(t, s)$  has a real eigensystem,

$$\int_0^1 K(s, t) v_i(t) dt = \lambda_i v_i(s), \quad i = 1, 2, 3, \dots$$

Then we can write the solution as

$$f(t) = \sum_{i=1}^{\infty} \frac{\langle v_i, g \rangle}{\lambda_i} v_i(t), \quad \langle v_i, g \rangle = \int_0^1 v_i(s) g(s) ds.$$



This is very useful for analysis of inverse problems (but not so much for numerical computations).

# A Tricky Example ...

$$\int_0^1 \frac{1}{s+t+1} f(t) dt = g(s) = 1, \quad 0 \leq s \leq 1.$$

Can you guess a solution?








Eigenvalues and eigenfunctions:

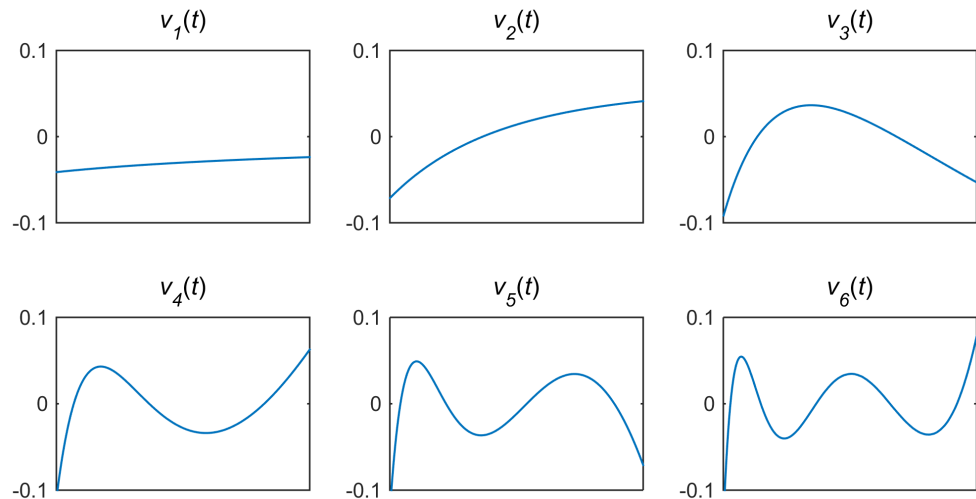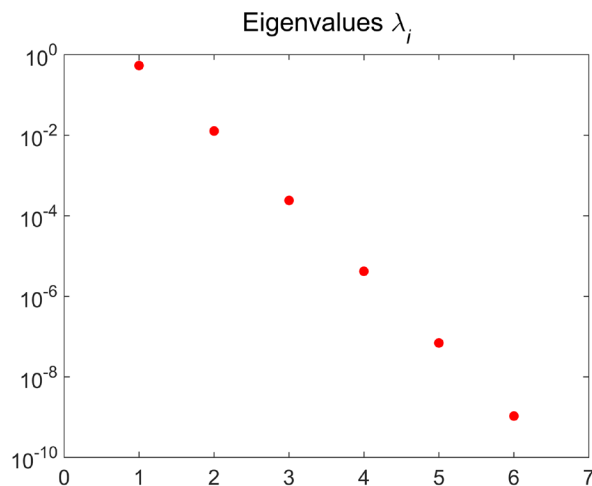

# ... With No Solution

Let us compute finite approximations to the solution:

$$f_k(t) \equiv \sum_{i=1}^k \frac{\langle v_i, g \rangle}{\lambda_i} v_i(t), \quad i = 1, 2, 3, \dots$$

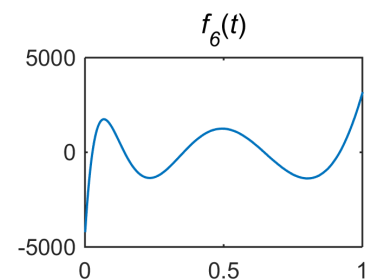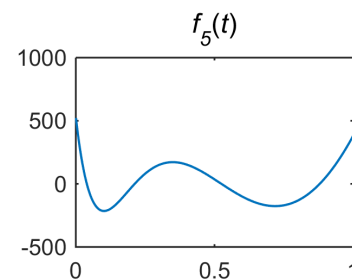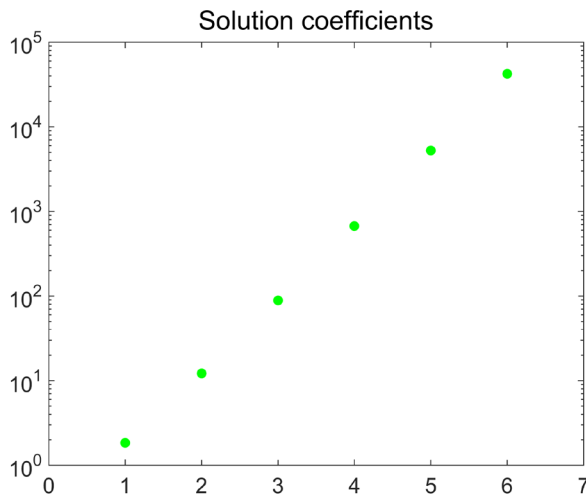

The amplitude of  $f_k(t)$  becomes disturbingly large as  $k$  increases, and the sum does not converge as  $k \rightarrow \infty$ .

# Inverse Problems Are Ill Posed

Hadamard's definition of a **well-posed problem** (early 20th century)

1. Existence: the problem must have a solution.
2. Uniqueness: the solution must be unique.
3. Stability: it must depend continuously on data and parameters.

If the problem violates any of these requirements, it is **ill posed**.

Inverse problems are, by nature, always **ill posed**.

And yet, we have a strong desire – and a need – to solve them ...

# Hadamard 1 (existence) and 2 (uniqueness)

## Case 1

$$Ax = b \Leftrightarrow \begin{pmatrix} 1 & 1 \\ 1 & 2 \\ 1 & 3 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} = \begin{pmatrix} 2.1 \\ 3.0 \\ 3.9 \end{pmatrix}$$

There is no  $x$  that satisfies this equation, but we can define the **least squares solution** that minimizes the residual norm

$$x_{\text{LS}} \equiv \operatorname{argmin}_x \|Ax - b\|_2 = \begin{pmatrix} 1.2 \\ 0.9 \end{pmatrix}$$

## Case 2

$$Ax = b \Leftrightarrow \begin{pmatrix} 1 & 2 \\ 1 & 2 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} = \begin{pmatrix} 3 \\ 3 \end{pmatrix}.$$

There are infinitely many  $x$  that satisfy this equation; we can define the unique **minimum-norm solution** that minimizes the solution's norm

$$x_0 \equiv \operatorname{argmin}_x \|x\|_2 \quad \text{s.t.} \quad Ax = b \quad \Rightarrow \quad x_0 = \begin{pmatrix} 0.6 \\ 1.2 \end{pmatrix}.$$

## Hadamard 3 (stability)

Unperturbed system:

$$A = \begin{pmatrix} 1.0 & 2.1 & 3.0 \\ 4.0 & 5.0 & 5.9 \\ 7.0 & 8.0 & 9.0 \end{pmatrix}, \quad x = \begin{pmatrix} 1 \\ 1 \\ 1 \end{pmatrix}, \quad b = Ax = \begin{pmatrix} 6.1 \\ 14.9 \\ 24.0 \end{pmatrix}.$$

Perturbed system:

$$\tilde{b} = b + \begin{pmatrix} 0 \\ 0.001 \\ 0 \end{pmatrix} \Rightarrow \tilde{x} = A^{-1}\tilde{b} = \begin{pmatrix} 0.927 \\ 1.171 \\ 0.904 \end{pmatrix}.$$

The matrix  $A$  is ill conditioned,  $\text{cond}(A) = 4249$ , and therefore the solution is very sensitive to perturbations of  $b$  and  $A$ :

$$\frac{\|\Delta x\|}{\|x\|} \leq \text{cond}(A) \left( \frac{\|\Delta b\|}{\|b\|} + \frac{\|\Delta A\|}{\|A\|} \right).$$

# Eigenvalue Analysis for Symmetric Kernel

Recall that we can write the solution as

$$f(t) = \sum_{i=1}^{\infty} \frac{\langle v_i, g \rangle}{\lambda_i} v_i(t) , \quad \langle v_i, g \rangle = \int_0^1 v_i(s) g(s) ds .$$

**Picard condition** for a square integrable solution:

$$\|f\|_2^2 = \sum_{i=1}^{\infty} \left( \frac{\langle v_i, g \rangle}{\lambda_i} \right)^2 < \infty .$$


The numerator must decay *sufficiently faster* than the denominator.

Specifically, the coefficients  $\langle v_i, g \rangle$  must decay faster than  $\lambda_i i^{-1/2}$ .


# Eigenvalue Analysis for Symmetric Kernel

Recall: the coefficients  $\langle v_i, g \rangle$  must decay faster than  $\lambda_i i^{-1/2}$ .

Test problem – **gravity** from Regularization Tools (Hansen, 2007):

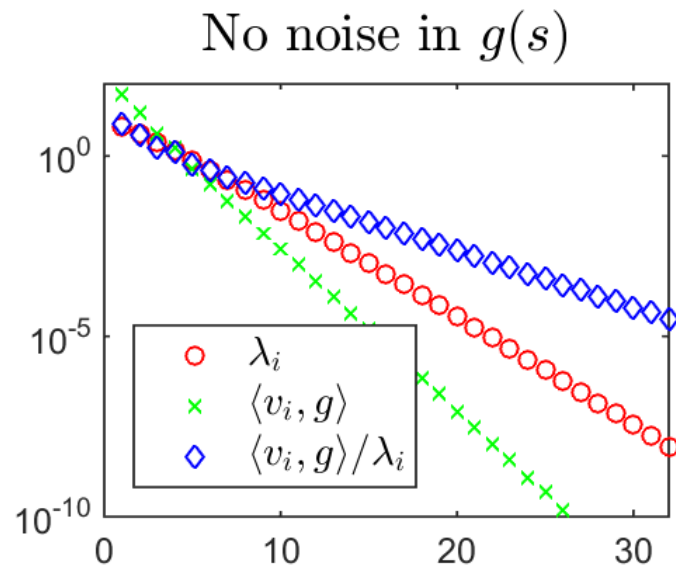

With no noise in the data, the Picard condition is satisfied.

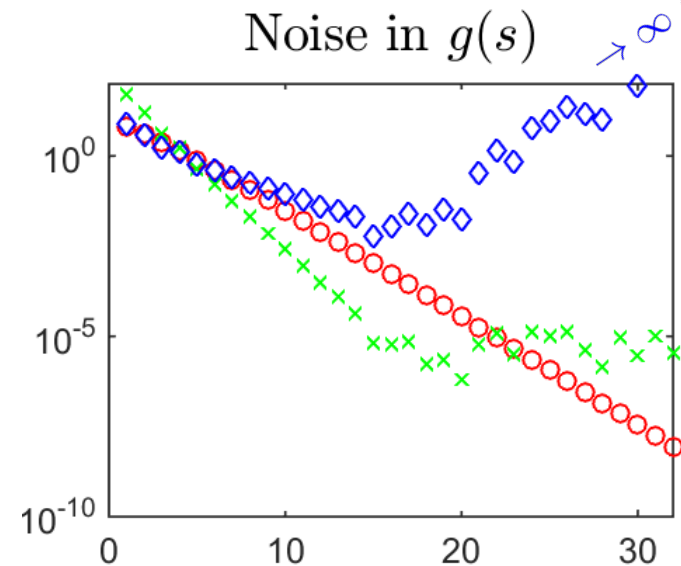

When noise is present, the Picard condition is **not** satisfied. The solution coefficients **diverge**.



# Dealing with the Instability $\rightarrow$ Regularization

The ill conditioning of the problem makes it impossible to compute a “naive” solution to the inverse problem:

$$K f = g \quad \rightarrow \quad \cancel{f_{\text{naive}} = K^{-1} g}$$



$\rightarrow$  Incorporate prior information about the solution via **regularization**:

$$\min_f \{ \|K f - g\|_2^2 + \alpha R(f) \} , \quad R(f) = \text{regularizer}$$


# Eigenvalue Analysis of Tikhonov Regularizer

The important special case of Tikhonov regularization


$$R(f) = \|f\|_2^2 \quad \Rightarrow \quad f(t) = \sum_{i=1}^{\infty} \frac{\lambda^2}{\lambda^2 + \alpha} \frac{\langle v_i, g \rangle}{\lambda_i} v_i(t) .$$

Here  $\phi_i = \frac{\lambda^2}{\lambda^2 + \alpha}$  are the *filter factors*.

Noise in  $g(s)$

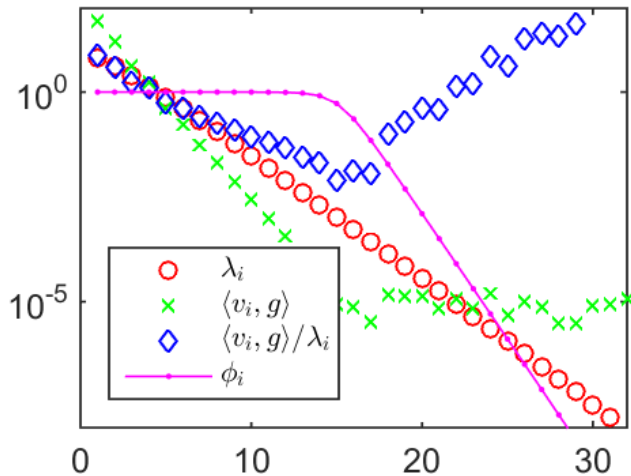

Tikhonov

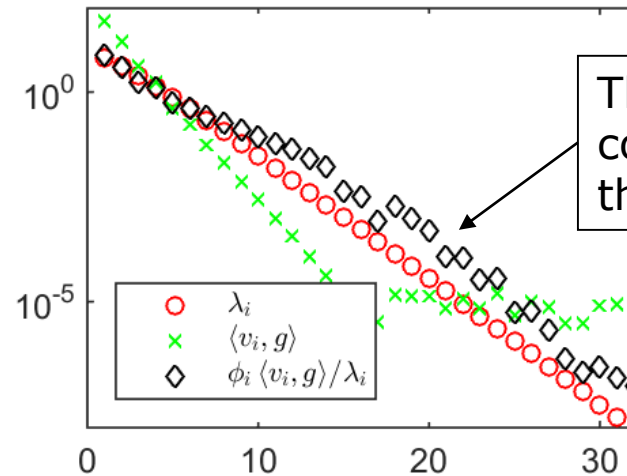

These *modified* coefficients satisfy the Picard condition.

Stabilization accomplished!

# Case: Total Variation (TV)

Prior: image consists of regions with constant intensity and sharp edges.  
How to say this *in mathematical terms*?

Total variation regularization term  $R(f) = \int_{\Omega} \|\nabla f\|_2 d\Omega \rightarrow$

$$R(x) = \sum_{\text{pixels}} \|D_i x\|_2, \quad D_i x = \text{gradient}$$



# Case: Directional TV (DTV)




Kongskov, Dong, Knudsen, *Directional total generalized variation regularization*, 2019.

Prior: the edges in the image have a dominating direction  $\theta$ .  
How to say that in mathematical terms?

Directional TV regularization term:

$$R(f) = \int_{\Omega} \left\| \begin{pmatrix} D_{\theta} f \\ \gamma D_{\theta^{\perp}} f \end{pmatrix} \right\|_2 d\Omega ,$$

where  $D_{\theta}$  is the directional derivative.

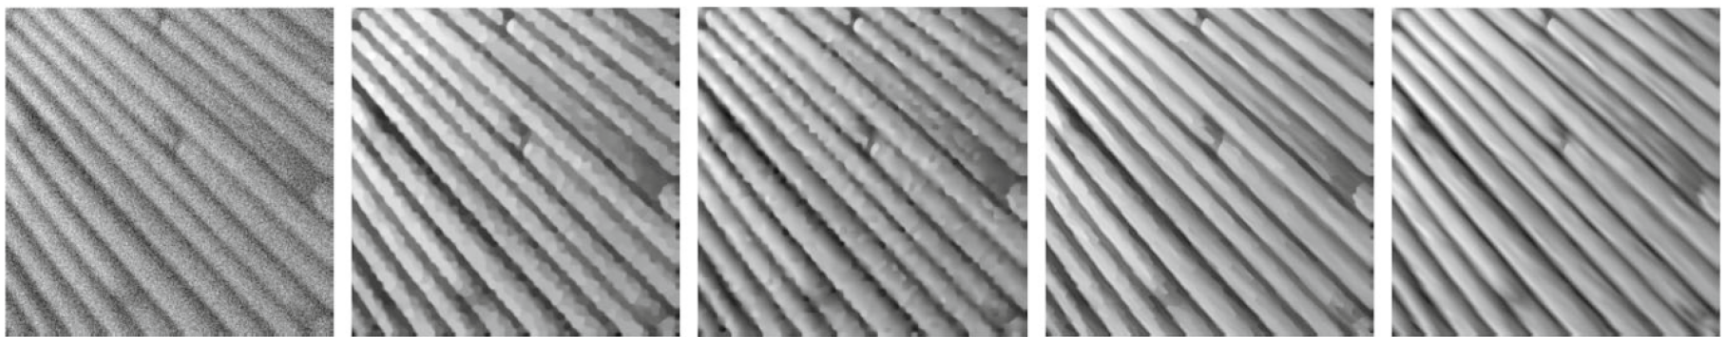

Blurred and noisy

TV and similar methods

Directional TV

# Case: Regularization with Sparsity Prior

TV = a "sparsity prior" that produces a solution with a *sparse gradient*.

We can also require that the *solution itself is sparse*, i.e., the image has many nonzero pixels. How to say this in mathematical terms?

Use the 1-norm to enforce sparsity:

$$R(x) = \|x\|_1 = \sum_i |x_i| .$$

Candès, Donoho, Romberg, Tao.

This is well known from **compressed sensing** where it is successfully used to reconstruct a sparse signal  $x$  from limited data.

**THEOREM:** we can reconstruct a sparse  $x \in \mathbb{R}^n$  with at most  $p$  nonzeros from a data vector  $b \in \mathbb{R}^m$  with  $b = Ax$  if  $A$  is random and  $m \approx 2p$ .


In our inverse problems,  $A$  is certainly not random – it is a discretization of the forward operator.




Surprisingly, we can still use a 1-norm regularization term  $R(x) = \|x\|_1$ .

# Case: Sparse CT Reconstruction

Jørgensen, Sidky, H, Pan, *Empirical Average-Case Relation Between Under-sampling and Sparsity in X-Ray CT*, 2015.



Artificial sparse test images.  Left to right: 5%, 10%, 20%, 40%, 60%, 80% nonzeros.

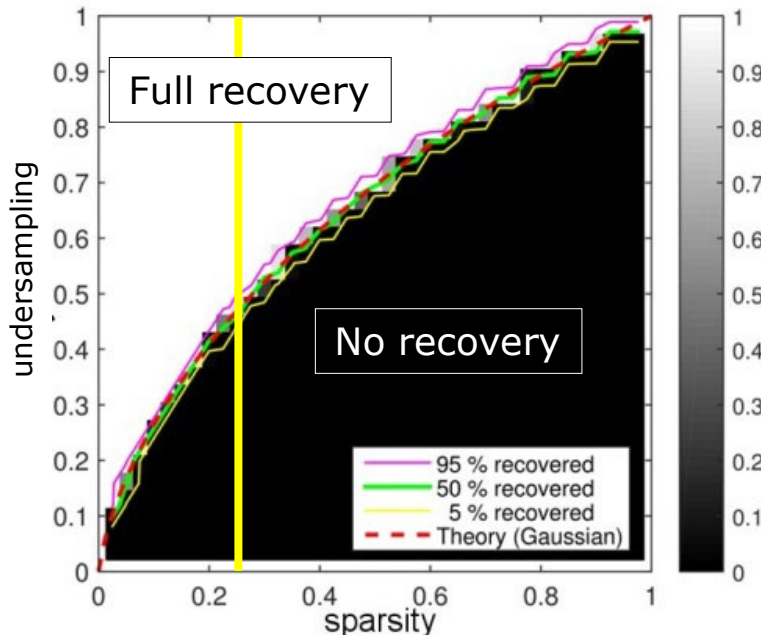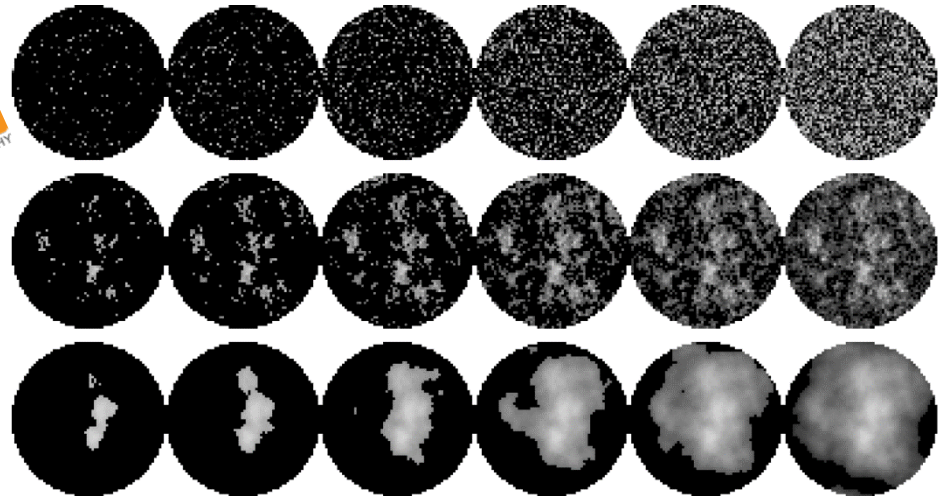

**Phase diagram:** the *recovery fraction* of reconstructed images at a given *sparsity* abruptly changes from 0 to 1, once a critical number of measurements is reached. Agrees with the theoretical phase transition for random matrices (Donoho, Tanner 2009).


# Case: Training Images as Regularizer




Soltani, Kilmer, H, *A tensor-based dictionary learning approach to tomographic image reconstruction*, 2016.

Soltani, Andersen, H, *Tomographic image reconstruction using training images*, 2017.


Training images  
are *patches* from  
high-res image.

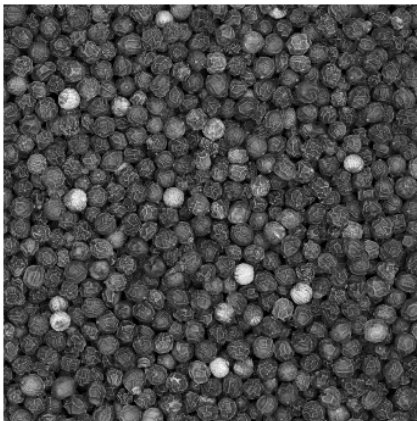

Dictionary patches  
*learned* via nonneg.  
matrix factorization.

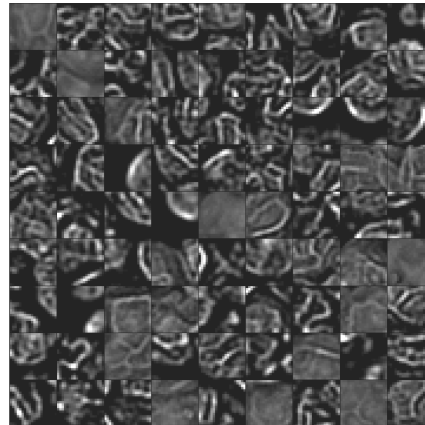

Reconstruction  
computed from highly  
*underdet.* problem.

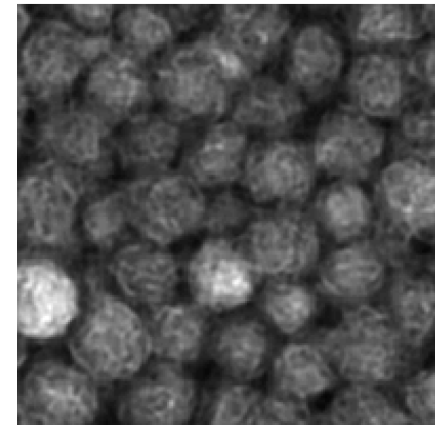

Dictionary




Sparsity prior on dictionary elements




$$\min_z \|A W z - b\|_2^2 + \alpha \|z\|_1, \quad x = W z .$$

# Case: When the Training Images are Wrong

Soltani, Andersen, H, *Tomographic image reconstruction using training images*, 2017.

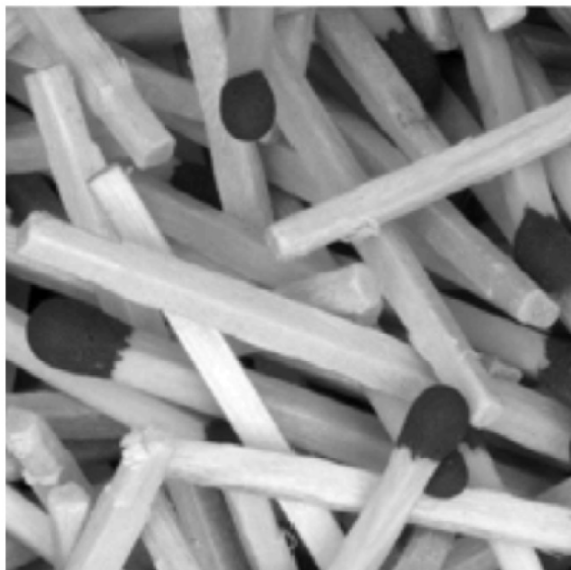

Exact image

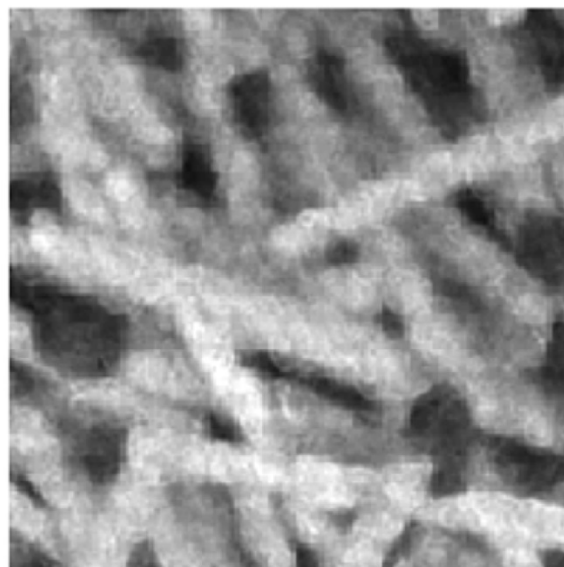



The “best” reconstruction based on a **wrong** dictionary created from the peppers training image.

Peppermatches?



# Algorithm Development – Iterative Methods

Large-scale problems  $Ax = b$ .  
How to solve them efficiently?  
→ Iterative methods!

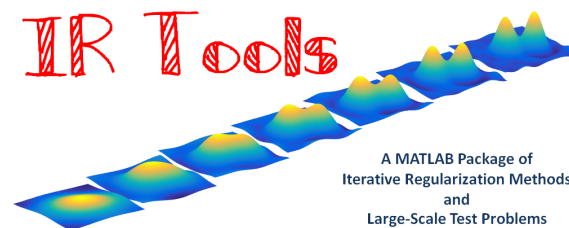

Gradient (steepest descent) method for computing CT solutions:

$$x^k \leftarrow x^{k-1} + \omega B(b - Ax^{k-1}) .$$

Here  $A$  = Radon transform = forward projector, and  $B$  = backprojector.

By definition,  $B = A^T$  and  $x^k$  converges to the least squares solution.

So who in their right mind would write software where  $B \neq A^T$ ?

All good HPC-programmers! Efficient use of GPUs etc.

*Need to study the implications of this fact.*

# Convergence Explained

Convergence of an iterative method means that the sequence of iteration vectors

$$x^0 \rightarrow x^1 \rightarrow x^2 \rightarrow x^3 \rightarrow \dots$$

approaches a limit vector as  $k \rightarrow \infty$ .

For the steepest descent method (with  $B = A^T$ ) we have

$$x^k \rightarrow x_{\text{LS}} \quad \text{for} \quad k \rightarrow \infty ,$$

where  $x_{\text{LS}}$  is the least squares solution.


The *conditions* for convergence are:

$$0 < \omega < 2 \frac{\text{Re } \lambda_j}{|\lambda_j|^2} \quad \text{and} \quad \text{Re } \lambda_j > 0 ,$$

where  $\lambda_j$  are the eigenvalues of  $BA$ .

# Nonconvergence!


Parallel-beam CT, unmatched pair from *ASTRA*,  $64 \times 64$  Shepp-Logan phantom, 90 projection angles, 60 detector pixels,  $\min \operatorname{Re} \lambda_j = -6.4 \cdot 10^{-8}$ .

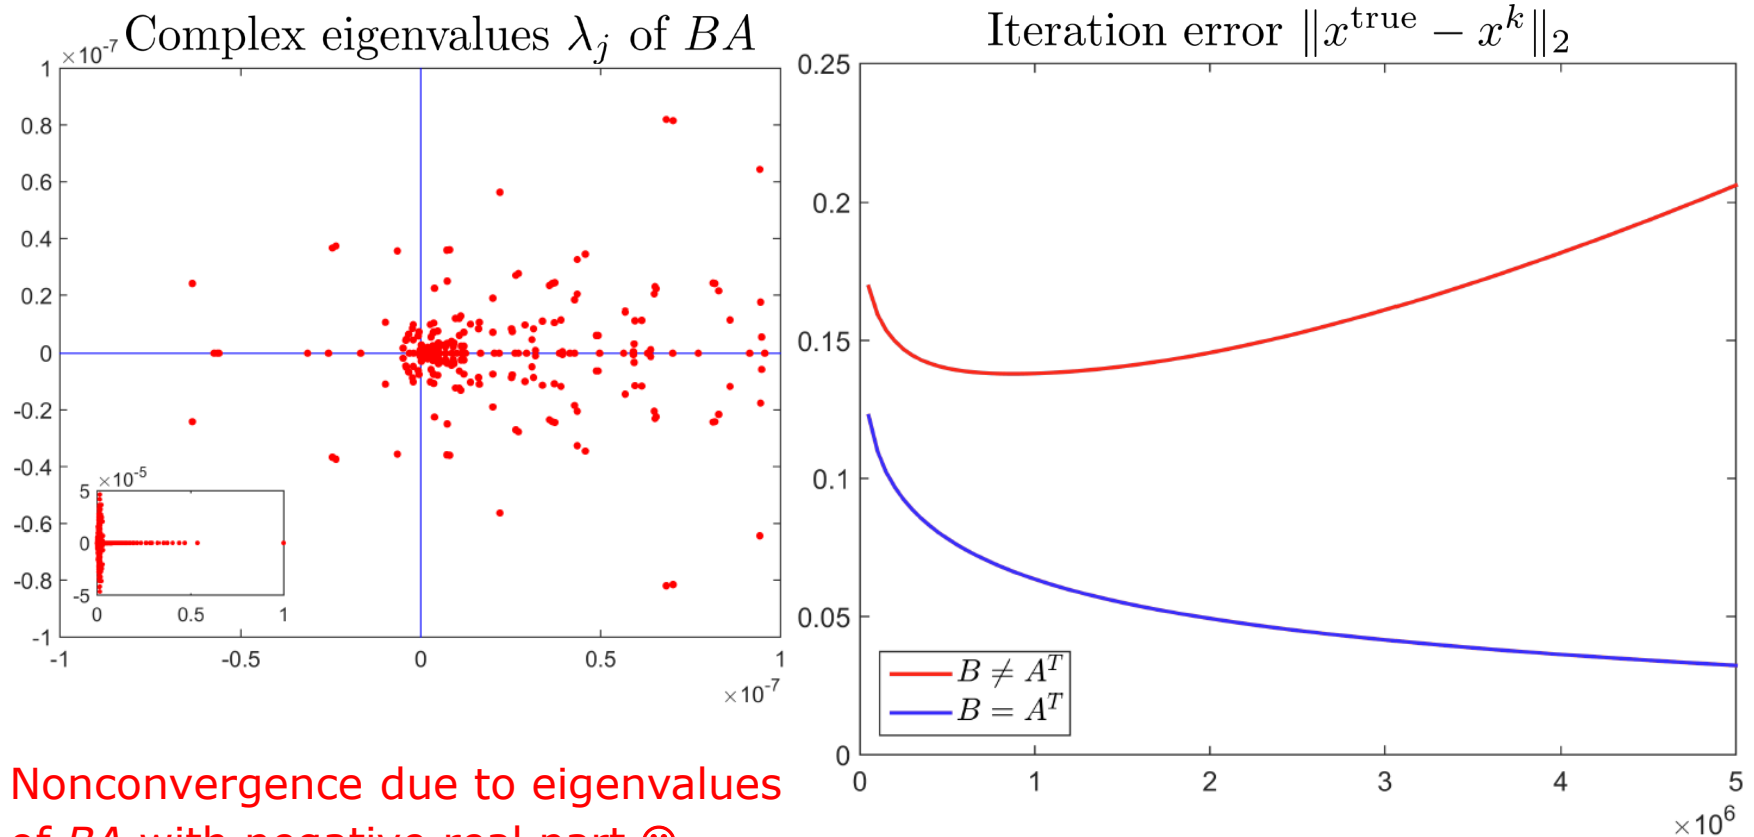

Nonconvergence due to eigenvalues of  $BA$  with negative real part ☹

# The Fix

1. Ask the software developers to change their implementation of  $B$  and/or  $A$ ?  
→ Significant loss of comput. efficiency.
2. Use mathematics to *fix* the nonconvergence.

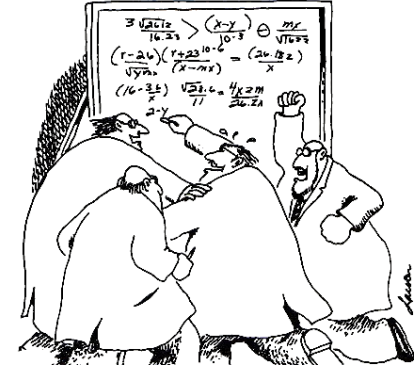

We define the **shifted** version of the iterative algorithm:

$$x^{k+1} = (1 - \sigma \omega) x^k + \omega B (b - A x^k), \quad \alpha > 0$$

with just one extra factor  $(1 - \sigma \omega)$ ; simple to implement.

Condition for convergence:

$$0 < \omega < 2 \frac{\text{Re } \lambda_j + \sigma}{|\lambda_j|^2 + \sigma (\sigma + 2 \text{Re } \lambda_j)} \quad \text{and}$$

$\text{Re } \lambda_j + \sigma > 0$  .  
Choose the shift  $\sigma$   
*just large enough!*

Dong, H, Hochstenbach, Riis; SISC, 2019.


# Nonconvergente $\rightarrow$ Convergence

Parallel-beam CT, 90 projections in the range  $0^\circ$ – $180^\circ$ , 80 detector pixels;  $128 \times 128$  Shepp-Logan phantom;  $m = 7\,200$  and  $n = 16\,384$ .

Both  $A$  and  $B$  are generated with the GPU-version of the ASTRA toolbox.

$$\rho(BA) = 1.76 \cdot 10^4$$

$$\alpha = 1.85$$

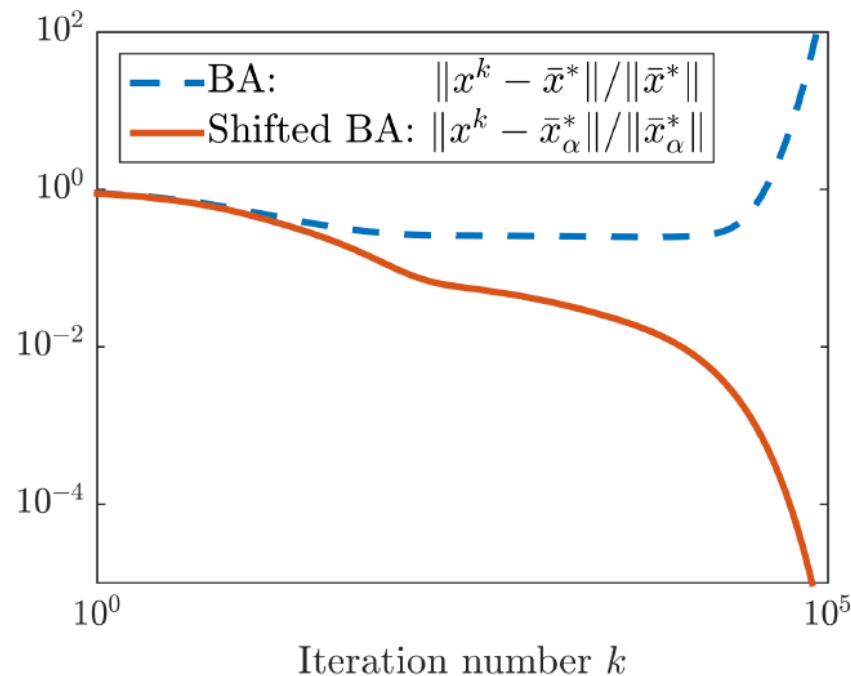

The BA Iteration diverges from  $\bar{x}^* = (BA)^{-1}Bb$ .

The Shifted BA Iteration converges to fixed point  $\bar{x}_\alpha^* = (BA + \alpha I)^{-1}Bb$ .

# Beyond Sharp Reconstructions → CUQI

Classical method.

Figure credit to E. Sidky


960-view FDK

96-view TV

TV regularization needs only 10% of full X-ray dose.

But how **reliable** are the spots?

All kinds of errors have influence on the solution:

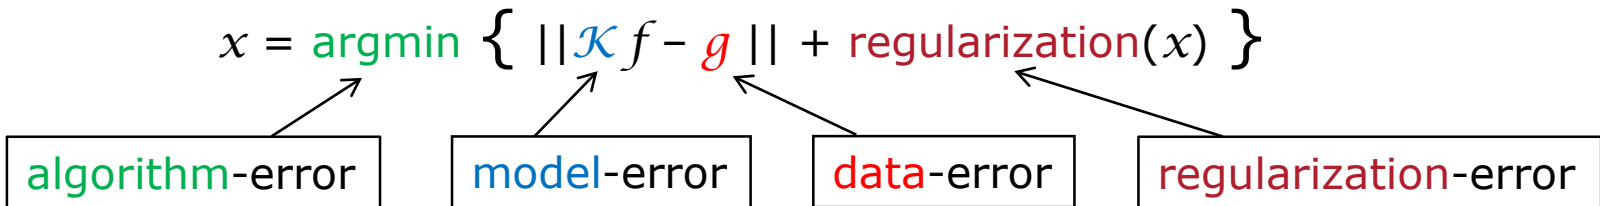

**UQ = uncertainty quantification** is the end-to-end study of the impact of all forms of error and uncertainty in the data and models.




Computational Uncertainty Quantification for Inverse Problems  
 A research initiative sponsored by Villum Fonden (the Villum Foundation)



Picture taken by Per Christian Hansen in the garden of the Heian Shrine in Kyoto, Japan.



**CUQI**

# Applied UQ

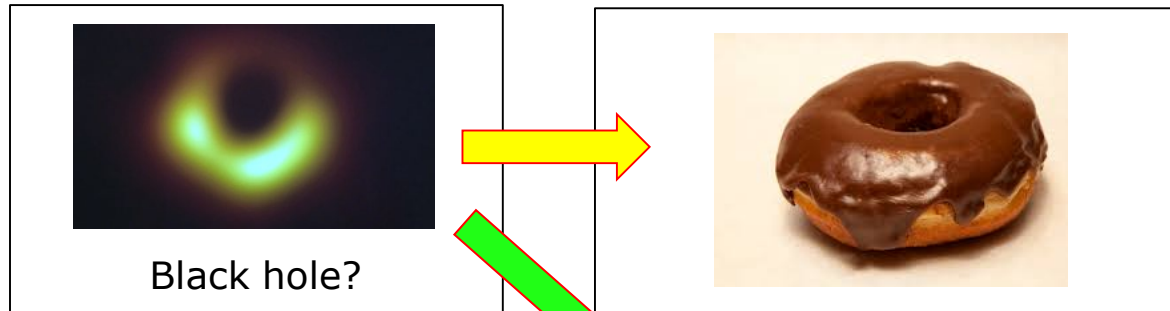

Traditionally: one result.  
How trustworthy is it?

UQ gives insight about the reliability of the result.

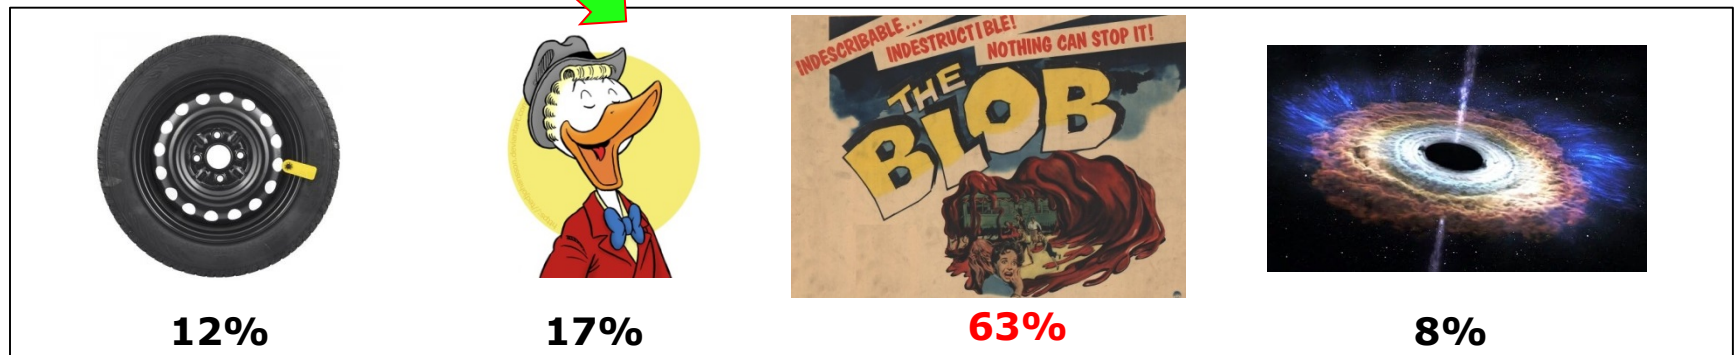


## Computational Uncertainty Quantification for Inverse Problems

- Develop the mathematical, statistical and computational framework.
- Create a modeling framework and a computational platform for non-experts.

### Vision

Computational UQ becomes an essential part of solving inverse problems in science and engineering.

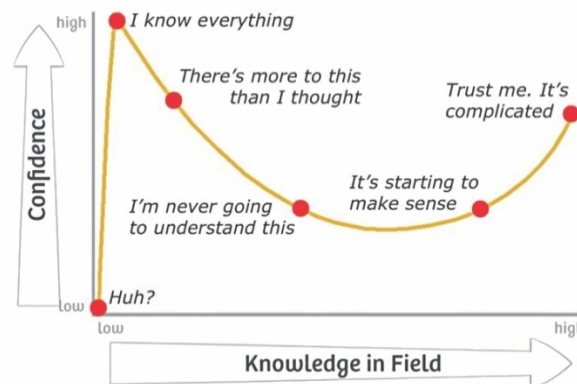



# UQ: Gaussian Data Errors and Gaussian Prior

Model:  $b = A \bar{x} + e$  with  $A \in \mathbb{R}^{m \times n}$  fixed and  $e = \mathcal{N}(0, \sigma^2 I)$ .

The pdf for  $b$ , given  $x$  and  $\sigma$  (known as the *likelihood*):

$$p(b|x, \sigma) = \left( \frac{1}{2\pi\sigma^2} \right)^{m/2} \exp\left( -\frac{1}{2\sigma^2} \|Ax - b\|_2^2 \right).$$


The unknown  $x$  is a random vector. Assume a Gaussian prior  $x \sim \mathcal{N}(0, \delta^{-1}I)$  this yields the prior

$$p(x|\delta) = \left( \frac{\delta}{2\pi} \right)^{n/2} \exp\left( -\frac{\delta}{2} \|x\|_2^2 \right).$$


Bayes rule/law/theorem defines the *posterior* for  $x$ :

$$\begin{aligned} p(x|b, \sigma, \delta) &= \frac{p(b|x, \sigma) p(x|\delta)}{p(b|\sigma, \delta)} \propto p(b|x, \sigma) p(x|\delta) \\ &\propto \text{const} \cdot \exp\left( -\frac{1}{2\sigma^2} \|Ax - b\|_2^2 \right) \cdot \exp\left( -\frac{\delta}{2} \|x\|_2^2 \right) \\ &\propto \exp\left( -\|Ax - b\|_2^2 - \alpha \|x\|_2^2 \right), \quad \alpha = \delta \sigma^2. \end{aligned}$$


# UQ in Image Deblurring

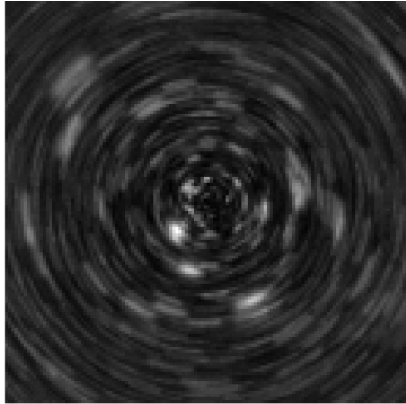

Measured blurred image.

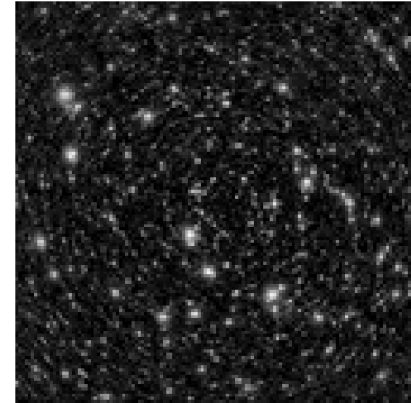

A solution (MAP estimator).

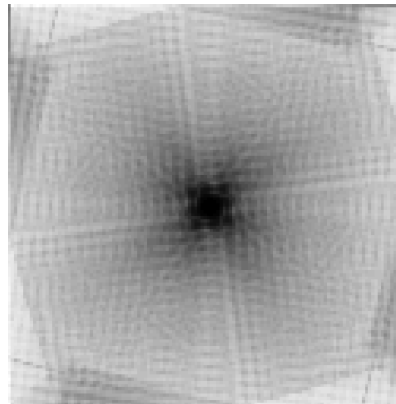


UQ shows uncertainty in each pixel; white denotes high uncertainty.

# Case: UQ with Non-Negative Prior

If the **prior** or **likelihood** is non-Gaussian, we must **sample** the **posterior**: we generate many random instances of the regularized solution with the specified likelihood and prior.


CUQI

Bardsley, Hansen, *MCMC Algorithms for Non-negativity Constrained Inverse Problems*, 2019.

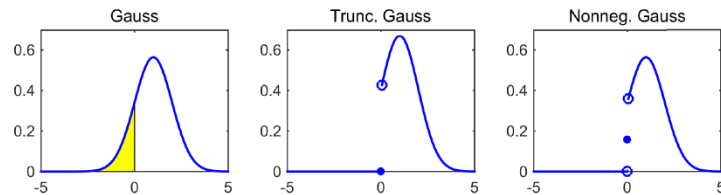


We have an analytical expression for the **prior**, but no analytical expression for the **posterior**.


Mean of samples

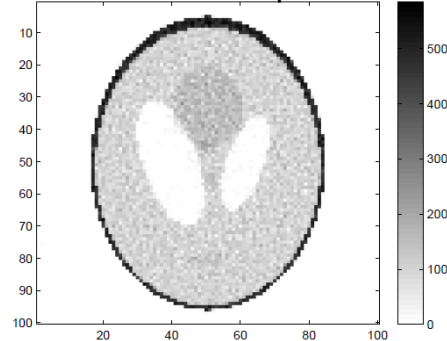


MAP estimate

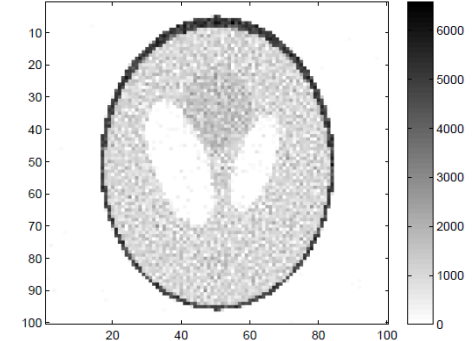

Hist. of reg. parameters

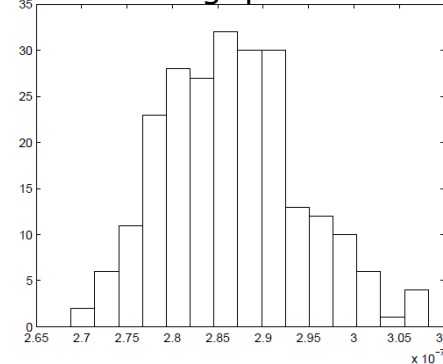

Standard deviation

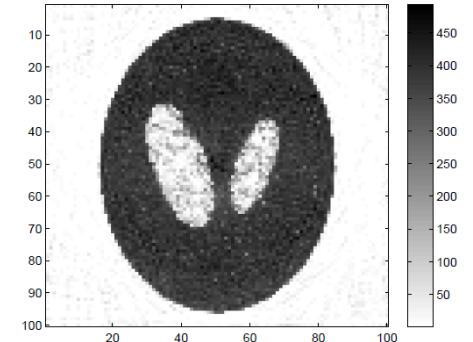


*Positron Emission Tomography.*  
Solutions sampled by a new Poisson Hierarchical Gibbs Sampler.


# Case: UQ for Model Discrepancies



Dong, Riis, Hansen, *Modeling of sound fields*, joint with DTU Elektro, 2019.

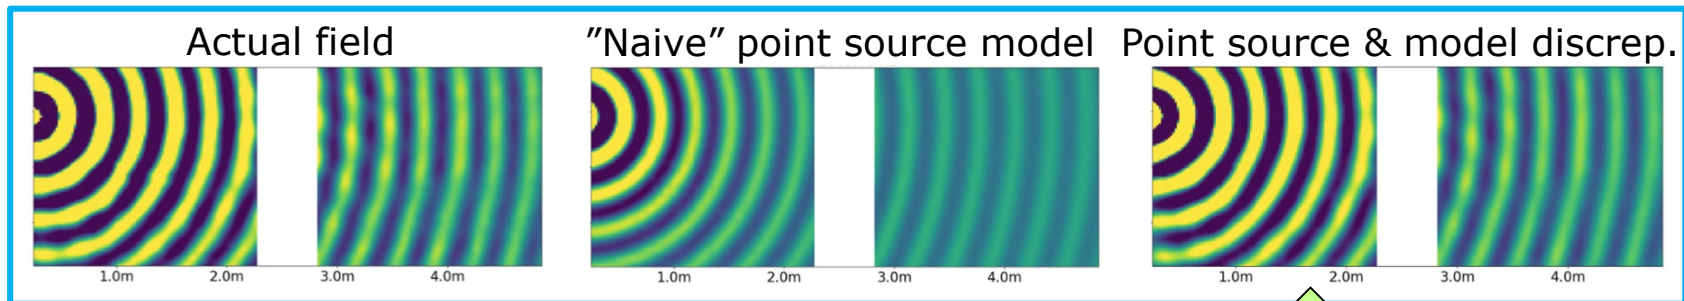

Described by a Gaussian process

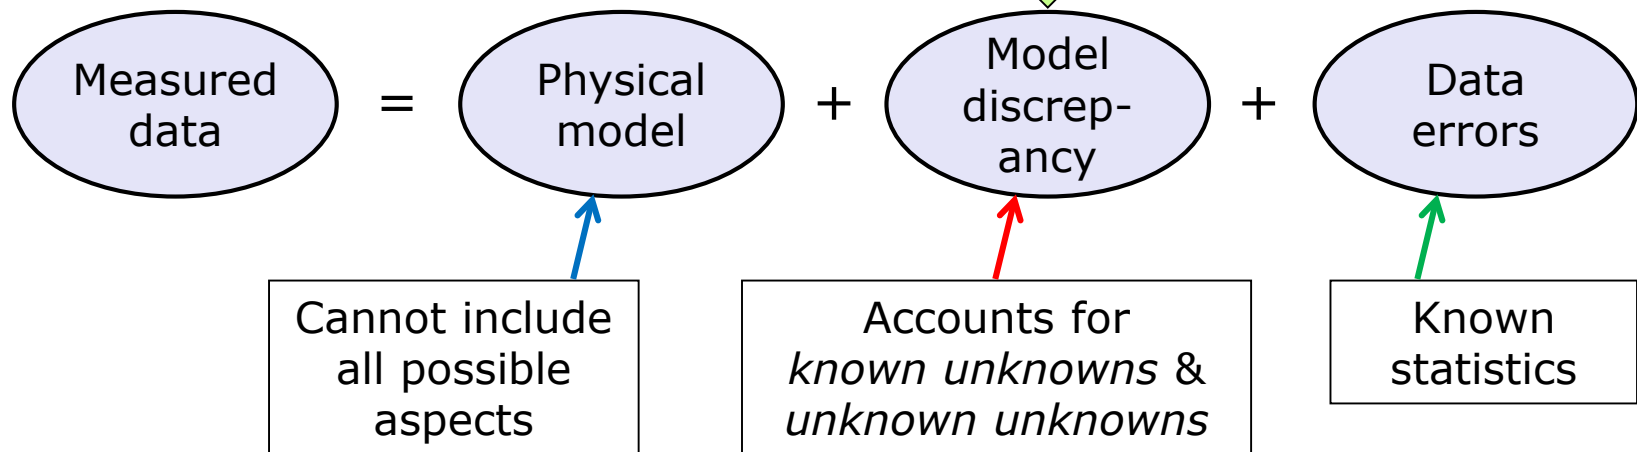

# HD-Tomo: High-Definition Tomography


The following examples are from the project **HD-Tomo**, which was funded by an ERC Advanced Research Grant, 2012–17.



## Objective: Optimal Use Prior Information

*Tomographic imaging* allows us to see inside objects. Doctors look for cancer, physicists study microscopic details of materials, security personnel inspect luggage, engineers identify defects in pipes, concrete, etc.

To achieve **high-definition tomography**, sharp images with reliable details, we must use *prior information* = *accumulated knowledge about the object*. **This project: how to do this in an optimal way.**





## Outcome: Insight, Framework and Algorithms

We developed *new theory* that provides insight and understanding of the challenges and possibilities of using advanced priors. This insight allowed us to develop a *framework for precisely formulated tomographic algorithms* that produce *well-defined results*. We laid the groundwork for the next generation of algorithms that will further optimize the use of prior information. The project produced **47** journal papers, **6** proceeding papers, **7** software packages, **25** bachelor/master projects and **3** workshops.


# Example: Fault Inspection

Use X-ray scanning to compute cross-sectional images of oil pipes on the seabed. Detect *defects, cracks*, etc. in the pipe.

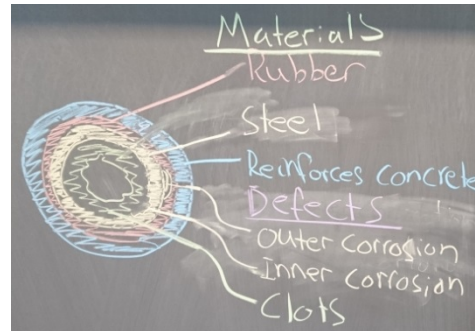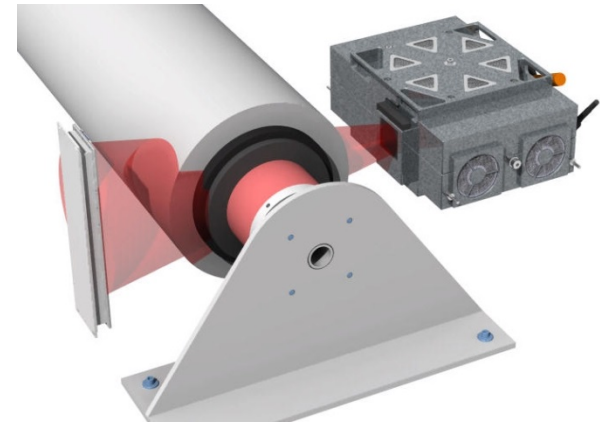

Required in the math. model

- Strength of the X-ray source.
- Specification of the geometry.
- Structure of the oil pipe.

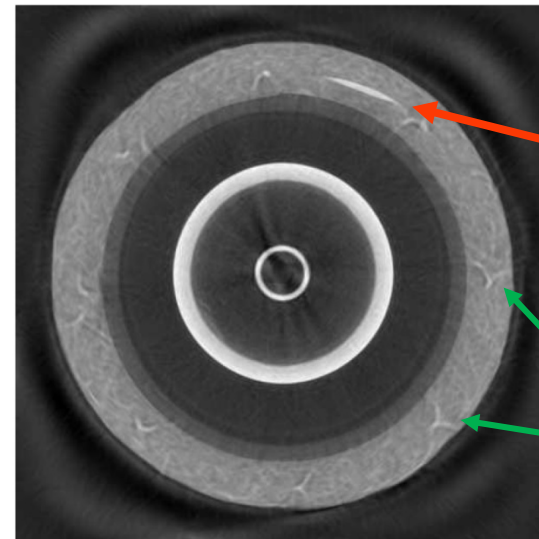

Defect!

Reinforcing bars